



# INSTALLATION GUIDE


MODEL#:ETF22-35W103SW-2/ETF24-50W103SW-2

LED Troffer Series | 2x2 Class | 2x4 Class  
 2 ft x 2 ft. All in One Retrofit Kit  
 2 ft x 4 ft. All in One Retrofit Kit



## Questions?

For customer service please call us at 1-310-787-1100  
 Office Hours: 8:00 a.m. – 5:00 p.m. PST Monday-Friday  
 E-mail: info@eurilighting.com

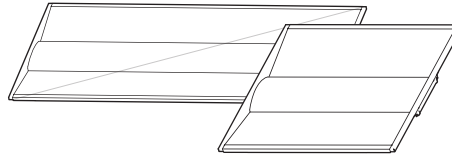

# LED Troffer

2 ft. x 2 ft.  
 2 ft. x 4 ft.

**PLEASE REVIEW THE INSTRUCTIONS AND WARNINGS LISTED BELOW PRIOR TO PROPER INSTALLATION**

IMPORTANT	WARNING
<ul style="list-style-type: none"> <li>Read Carefully before installing the fixture. Keep these instructions for future reference.</li> <li>Thoroughly inspect the fixture for any freight damage; Freight damage should be reported to delivery carrier.</li> <li>The fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety.</li> <li>This product <b>MUST</b> be installed in accordance with the applicable installation code by an electrician familiar with the construction and operation of the product.</li> </ul>	<ul style="list-style-type: none"> <li>Designed for use in 120-277V 50-60 Hertz.</li> <li><b>RISK OF ELECTRIC SHOCK:</b> Make sure power supply is OFF before installing or cleaning fixture. No user serviceable parts inside. Do NOT use the fixture within high humidity conditions.</li> <li>Keep away from flammable and explosive environment.</li> <li>Do NOT cover the fixture with insulation liner or similar material.</li> <li>Do NOT install where the fixture is loose or only partially supported.</li> <li>Do NOT impact or exert pressure on the fixture surface face or rear, as damage might occur.</li> <li>Suggested minimum clearance is 211mm after installation.</li> </ul>

## INSTALLATION

### WIRING GUIDE

- Wire input end of the LED driver to supply wires using connector according to wiring section. Wire connections must be insulated.
- Connect the BLACK/BROWN lead to LINE(+) supply lead.
- Connect the WHITE/BLUE lead to NEUTRAL/Common (-) supply lead.
- Connect the GREEN lead to GROUND supply lead.
- Connect PURPLE/BLUE to 0-10V SIGNAL supply lead and GREY/WHITE to 0-10V NEUTRAL/REFERENCE supply lead.

### ETF22-35W103SW-2

Watt	CCT
<p>pre-set watt:35w            35W, 25W</p> <p>pre-set CCT:5000K            5000K, 4000K, 3000K</p>	

### ETF24-50W103SW-2

Watt	CCT
<p>pre-set watt:50w            33W, 40W, 50W</p> <p>pre-set CCT:5000K            5000K, 4000K, 3000K</p>	

### HOOK INSTALLATION

- Fold the hook up with 90°, make it perpendicular to the Troffer.
- Bend the end of the hook to the right with 90°.
- Attach the hook on the housing onto the T-Bar.

Hook  
 Fold the hook up with 90°  
 Bend 90° in clockwise  
 knock Outs  
 Junction box

### WIRING DIAGRAM

ELECTRICAL SYSTEM	BLACK/BROWN=HOT/LINE WHITE/BLUE=NEUTRAL/Common GREEN/YELLOW=GROUND
0-10V DIMMING SYSTEM	PURPLE/BLUE=0-10V SIGNAL GREY/WHITE=NEUTRAL/REFERENCE

THIS PRODUCT MAY NOT BE COMPATIBLE WITH ALL DIMMERS, FOR MORE INFORMATION ABOUT DIMMER COMPATIBILITY PLEASE VISIT: [WWW.EURILIGHTING.COM](http://WWW.EURILIGHTING.COM)