

## **LED** EPN14-2050s-2

5000K

Class: LED Panel 1 ft. x 4 ft. Class

## **Product Description**

**LED** EPN14-2050s-2 thoughtfully designed for superior illumination, ultimate efficiency, and easy installation, this 1x4 LED panel offers a larger driver for more space when wiring and a sturdy concaveconvex the backplate for no light leakage. Double-sided welding provides a seamless, polished frame and PMMA material guarantees perfect light output without the risk of yellowing, this LED fixture panel delivers 5000 lumens with just 40 watts. Available in flicker-free Cool White (5000K). Look for EPN14-2040s-2 for Bright White (4000K).






\*Note: Design, features and specifications subject to change without notice. Some features may not be available on all models. For more information please visit: www.eurilighting.com or call 1-310-787-1100

Available only as a twin-pack. (EPN14-2050s-2 contains 2 LED Panels.)

## **Specifications**

	Input Power	Input Voltage	Lumen Output	Beam Angle	Center Beam	ССТ
40 W AC100-277V 5000 lm 120° N/A 5000 K	40 W	AC100-277V	5000 lm	120°	N/A	5000 K

CRI	Luminous Efficacy	Power Factor	Input Current	Base/Cap	Lamp Lifespan
80	125 lm/W	0.95	0.5 A	N/A	50,000 Hrs.

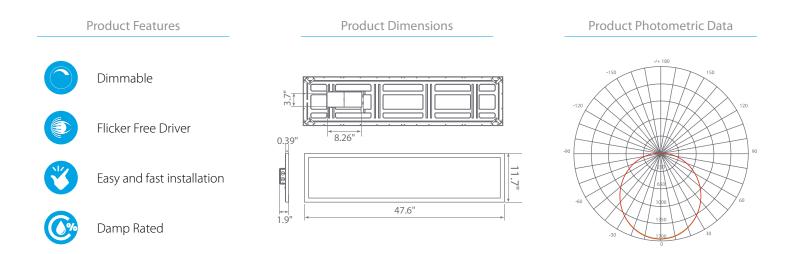

## Euri Lighting | A Division of IRTRONIX Inc.

20900 Normandie Avenue Bldg. B, Torrance, CA 90502 | Tel: 310.787.1100 | Fax: 310.787.1166 | www.eurilighting.com ©2019 Euri Lighting. All Rights Reserved