




**Questions?**

For customer service Please email us at [info@eurilighting.com](mailto:info@eurilighting.com)  
Office Hours: 8:00 a.m. – 5:00 p.m. PST Monday-Friday  
[www.eurilighting.com](http://www.eurilighting.com)

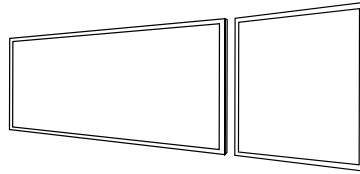

**LED Back-lit Flat Panel**

2x2 ft. | 2x4 ft.

**PLEASE REVIEW THE INSTRUCTIONS AND WARNINGS LISTED BELOW PRIOR TO PROPER INSTALLATION**

SAFETY INSTRUCTION	WARNING
<p>Basic safety precautions should always be followed when installing, including the following:</p> <ol style="list-style-type: none"> <li>1. Read instructions carefully before installing.</li> <li>2. This LED Panel requires professional installation and maintenance.</li> <li>3. The power supply of the LED Panel should be powered by a dedicated external LED driver.</li> <li>4. Disconnect the power supply before installing or maintenance.</li> <li>5. Make sure the wires have been properly connected before powering on the device.</li> <li>6. Ensure the product has enough space for heat dissipation.</li> <li>7. Ensure the luminaries are never covered by any heat insulation mat or slim layer material at anytime.</li> <li>8. IP40 for indoor use only, not for damp location; IP54 for indoor damp location.</li> <li>9. Ambient Temperature: -10C° to + 45C°, Avoid direct sunlight.</li> <li>10. Storage Conditions: Cool &amp; dry conditions.</li> </ol>	<ol style="list-style-type: none"> <li>1. Switch off before installation.</li> <li>2. Switch on only after complete installation and examination of the circuit.</li> </ol>
	CAUTION
	<p>Make sure that the mounting surface or structural member used for installation can support the weight of LED Panel.</p>


INSTALLATION PROCEDURE			
<p><b>1</b></p>	<p><b>2</b></p>	<p><b>3</b></p>	<p><b>4</b></p>
<p>1. Remove the knock-down hole on box by screwdriver (Part A), Remove screw, and take out the driver cover (Part B)</p>	<p>2. Connect the wire as the picture showing.</p>	<p>3. Cover the driver box and tighten it with a screwdriver, finish connection.</p>	<p>For the product with Slide Switch of CCT or power selection, please select the CCT or power needed before installation. (Ignore these steps if without the function)</p>
		<p>Lamp inspection before installation: Take out the lamp from the box and put it in a flat table, if the lamp upwarps, please adjust the lamp with below steps before installation:</p> <ol style="list-style-type: none"> <li>1. Press the opposite angles at the same time;</li> <li>2. Press another two opposite angles at the same time, make sure the four angles are flat, then start the installation.</li> </ol>	

RECESSED			
<p><b>1</b></p>	<p><b>2</b></p>	<p><b>3</b></p>	<p><b>4</b></p>
<p>1. Remove the ceiling plaster slab.</p>	<p>2. Feed the main AC wire in driver terminal block respectively, connect the panel light and driver.</p>	<p>3. Fix the panel light into plaster ceiling.</p>	<p>4. Make sure the led panel light is firmly fixed and turn on the power.</p>



## Questions?

For customer service Please email us at [info@eurilighting.com](mailto:info@eurilighting.com)  
Office Hours: 8:00 a.m. – 5:00 p.m. PST Monday-Friday  
[www.eurilighting.com](http://www.eurilighting.com)

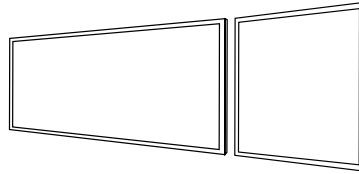

## LED Back-lit Flat Panel

2x2 ft. | 2x4 ft.

PLEASE REVIEW THE INSTRUCTIONS AND WARNINGS LISTED BELOW PRIOR TO PROPER INSTALLATION

### SUSPENDED

<p><b>1</b></p>	<p><b>2</b></p>	<p><b>3</b></p>	<p><b>4</b></p>
<p>1. Fix the anchor into target place on the ceiling.</p>	<p>2. Fix the installation mount on the ceiling with plastic anchor.</p>	<p>3. Hang the panel to ceiling with suspended installation kits, adjust the length of steel wires.</p>	<p>4. Feed the main AC wire in driver terminal block respectively and turn on the power.</p>

### SURFACE MOUNTED

<p><b>1</b></p>	<p><b>2</b></p>	<p><b>3</b></p>
<p>1. Fix the anchor into target place on the ceiling.</p>	<p>2. Fix the installation mount on the ceiling with plastic anchor.</p>	<p>3. Hang the panel to ceiling with suspended installation kits, adjust the length of steel wires.</p>
<p><b>4</b></p>	<p><b>5</b></p>	
<p>4. Fix the side frame back by screw.</p>	<p>5. Make sure the frame and panel light are firmly fixed, turn on the power.</p>	

### RECESSED MOUNTING (CLIPS)

<p><b>1</b></p> <p>100mm Min 30mm Min 30mm Min</p>	<p><b>2</b></p> <table border="1"> <thead> <tr> <th colspan="3">Cut Out Sizes</th> </tr> <tr> <th>Type</th> <th>A(mm)</th> <th>B(mm)</th> </tr> </thead> <tbody> <tr> <td>PL2X2</td> <td>578</td> <td>578</td> </tr> <tr> <td>PL1X4</td> <td>1188</td> <td>278</td> </tr> <tr> <td>PL2X4</td> <td>1188</td> <td>578</td> </tr> </tbody> </table> <p>Clips should be purchased separately as an accessory</p>	Cut Out Sizes			Type	A(mm)	B(mm)	PL2X2	578	578	PL1X4	1188	278	PL2X4	1188	578	<p>Warning: Input wire diameter <math>\geq 0.75\text{mm}^2</math>; Product modification and improper installation are not valid for warranty.</p>
Cut Out Sizes																	
Type	A(mm)	B(mm)															
PL2X2	578	578															
PL1X4	1188	278															
PL2X4	1188	578															