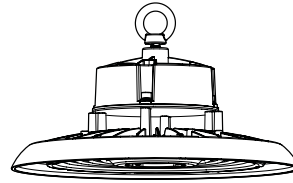








Questions?

For customer service please call us at 1-310-787-1100
Office Hours: 8:00 a.m. – 5:00 p.m. PST Monday-Friday
E-mail: info@eurilighting.com



LED UFO High Bay Light

PLEASE REVIEW THE INSTRUCTIONS AND WARNINGS LISTED BELOW PRIOR TO PROPER INSTALLATION

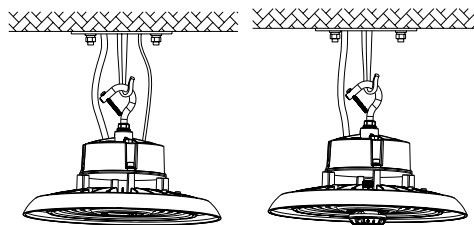
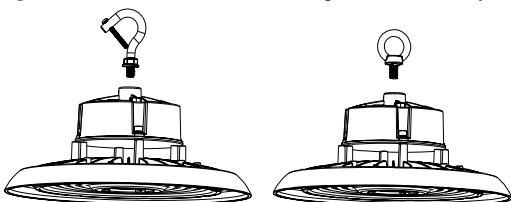
CAUTIONS		NOTICE		
<ul style="list-style-type: none">• Can not use the electric generator to test the LED light.• Please abide by related country, regional and local law and regulations when installing this fixture.• Please turn off the power before installation or maintenance.• Proper grounding is required to ensure safety.		<ul style="list-style-type: none">• To avoid possibility of electrical shock or fire, the installation personnel must have professional electric knowledge.• Please wear gloves to avoid injury before installation.• If there is any smoke or spark, please turn off the power immediately and consult a qualified electrician.• Please use listed water proof strain relief bushing when connection the supply cord to the outlet box.		
ATTENTION				
<ul style="list-style-type: none">• Please check if there is any damage during shipping. If so, please contact manufacturer in a timely manner.• Please read the installation instruction carefully to check whether all the accessories are complete.				
WIRING DIAGRAM & INSTRUCTION				
<p>This LED high bay light can be equipped with optional DC motion sensor, and is available with 1-10V dimming function, with following 3 dimming solutions :</p> <p>1. 1-10V dimming</p> <p>2. Intelligent dimming with DC motion sensor</p> <p>3. Pre-install tool-free handling DC motion sensor dimming module, and choose dimming function freely.</p>	<p>A</p> <p>GREEN/YELLOW GND BLACK/BROWN ACL WHITE/BLUE ACN PURPLE DIM+ GREY DIM- Pink AUX+</p> 		<p>B</p> <p>GREEN/YELLOW GND BLACK BROWN ACL WHITE/BLUE ACN</p> 	
	<p>C</p> <p>GREEN/YELLOW GND BLACK/BROWN ACL WHITE/BLUE ACN PURPLE DIM+ GREY DIM- Red AUX+ Black AUX-</p> 		<p>D</p> <p>GREEN/YELLOW GND BLACK/BROWN ACL WHITE/BLUE ACN PURPLE DIM+ GREY DIM-</p> 	
RECOMMENDED DIMMER LIST				
LUTON: NTSTV-DV / LEVITON: DS710-10Z / LEVITON: IP710 / Legrand: RH4FBL3PW				

INSTALLATION INSTRUCTIONS

Hook Mount, Ceiling Mount, 1/2"NPT Mount. (Please choose the most suitable installation method for the purchased product as per your needs)

HOOK MOUNT

- 1** Screw the hook into the fixture, tighten and fix into place.

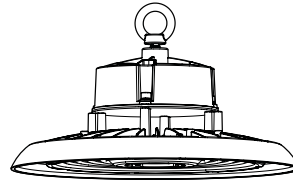


- 2** Hang the fixture on the ceiling hook or chain.
- 3** After installation, connect the wire of the fixture to the main power source according to local wiring rules, ensure the connection is stable and connected wires are well protected.



Questions?



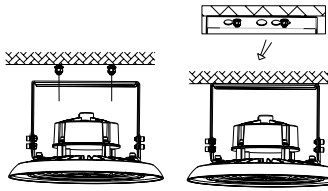

For customer service please call us at 1-310-787-1100
Office Hours: 8:00 a.m. – 5:00 p.m. PST Monday-Friday
E-mail: info@eurilighting.com




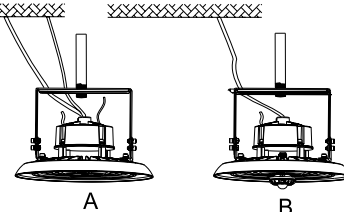
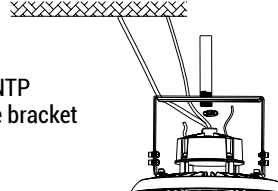
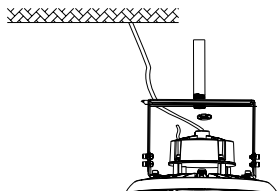
LED UFO High Bay Light

PLEASE REVIEW THE INSTRUCTIONS AND WARNINGS LISTED BELOW PRIOR TO PROPER INSTALLATION

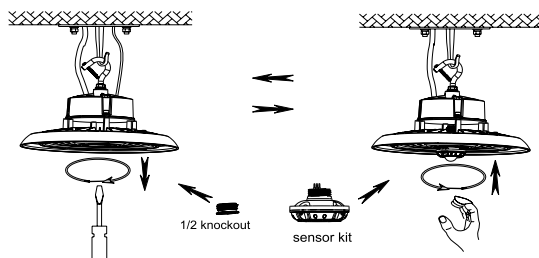
CEILING MOUNT

-  **1** Mark with a pen or sharp tool on the mounting surface and drill.
-  **2** Fix screws into the holes with a hammer.
-  **3** Align the bracket hole with screw hole, and push the fixture to one side and fix it.
-  **4** After installation, connect the wire of the fixture to the main power source according to local wiring rules, ensure the connection is stable and ensure the connected wires are well protected. By adjusting the brackets screws, users can vertically adjust 50° to the left or right vertically.

1/2" NPT Mount

-  **1** Unscrew the nuts on 1/2" NPT.
-  **2** Insert 1/2" NPT stem into the bracket hole.
-  **3** Re-screw the nuts.
-  **4** After installation, connect the wire of the fixture to the main power source according to local wiring rules, ensure the connection is stable and ensure the connected wires are well protected. By adjusting the brackets screws, users can vertically adjust 50° to the left or right vertically.

INSTALLATION OF DC MOTION SENSOR



The fixture has integrated function 3 Power selectable.
The setting could be customized. Operation: Take away the water-proof gasket, adjust dip switch to choose Power as per sign.
The original setting could be either factory default or customized request.