



**Questions?**

For customer service please call us at 1-310-787-1100  
Office Hours: 8:00 a.m. – 5:00 p.m. PST Monday-Friday  
E-mail: info@eurilighting.com




*LED Linear Suspended*  
**Up & Down light**

**PLEASE REVIEW THE INSTRUCTIONS AND WARNINGS LISTED BELOW PRIOR TO PROPER INSTALLATION**


**WARNINGS**

- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and hazards involved
- Risk of fire or electric shock. LED lamp installation requires knowledge of luminaries electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.
- Use in dry locations only.
- This lamp supports dimming function, must use with dimmers.
- Small noises when shaking does not affect the quality.


**ACCESSORIES BAG INCLUDES**

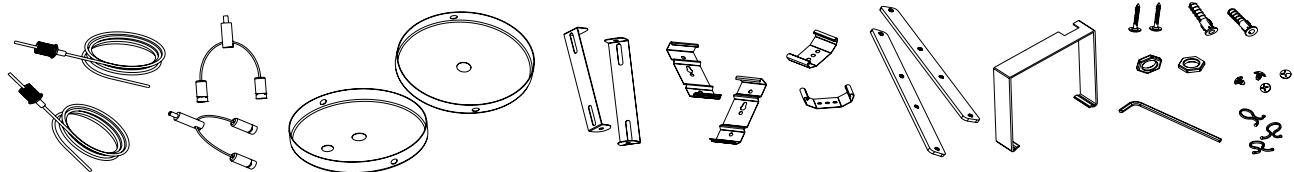


**SUPENSION INSTALLATION**

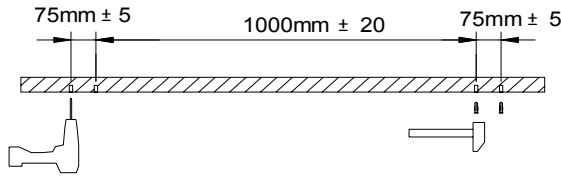


**1** Drill a hole of 5.0mm in diameter as shown in the figure at the location required for installation. Then hammer the plastic anchor into the hole.

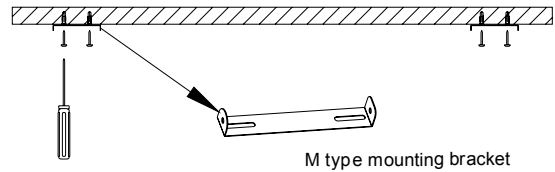


**2** Insert PA4\*35 screws into the M-type mounting bracket and then drill into the plastic anchor.

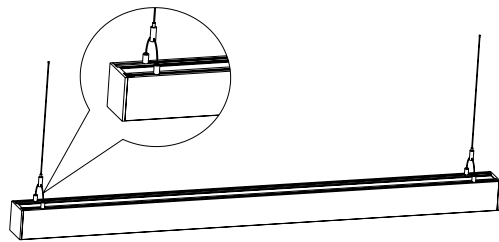


**3** Rotate and fasten 2 fixing heads and 2 screws of left end; hold steel wire rope and lift lamp upward, then adjust balance screws to balance light, finally tighten balance screws.

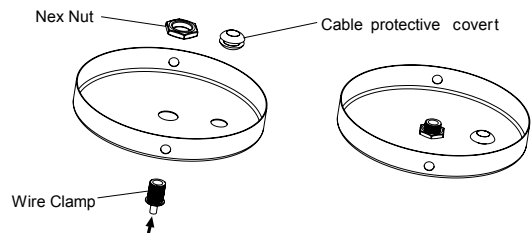

**4** Insert the wire clamp into the middle hole of the disc and tighten the wire clamp with hex nut; Clip the cable protective cover into the AC line hole of the disc.

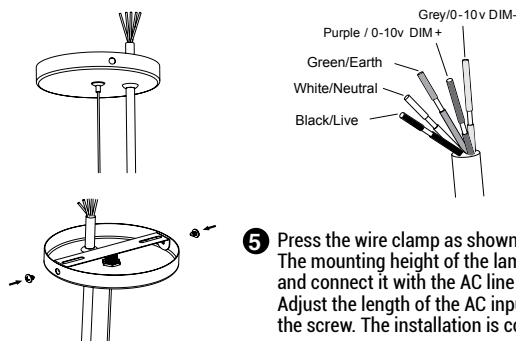

**5** Press the wire clamp as shown in the figure, and then insert the stainless steel wire into the inner hole of the wire clamp; The mounting height of the lamp could be adjusted by this wire clamp. Insert the AC input cable through the cable protective cover and connect it with the AC line by the corresponding connection wire with L, N, GND. Adjust the length of the AC input cable, align the side holes of the disc and the mounting bracket as shown in the figure, then tighten the screw. The installation is completed.

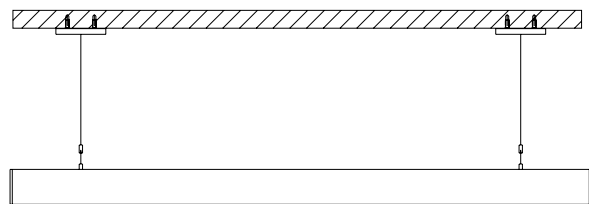



**Questions?**


For customer service please call us at 1-310-787-1100  
Office Hours: 8:00 a.m. – 5:00 p.m. PST Monday-Friday  
E-mail: info@eurilighting.com




*LED Linear Suspended*  
**Up & Down light**

**PLEASE REVIEW THE INSTRUCTIONS AND WARNINGS LISTED BELOW PRIOR TO PROPER INSTALLATION**


**SURFACE MOUNT INSTALLATION**

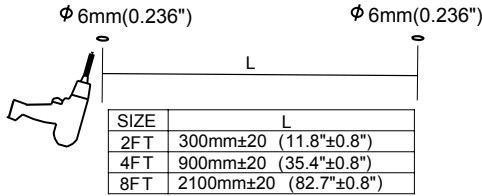


**1** Drill the hole on the ceiling (The size is shown in the picture).

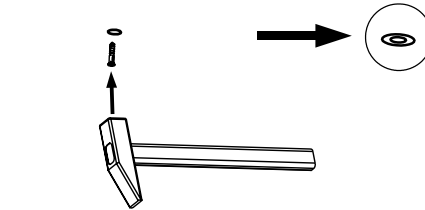

**2** Drill the anchoring into the opened hole with a nail hammer.

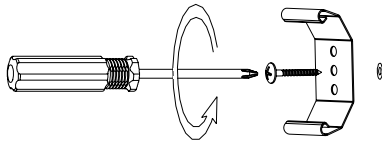


**3** Secure the mounting clips on the ceiling.

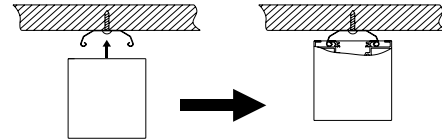

**4** Align the back of the lamp with the clips on the ceiling and install the fixture to the mounting clips.


**WALL MOUNTED INSTALLATION**

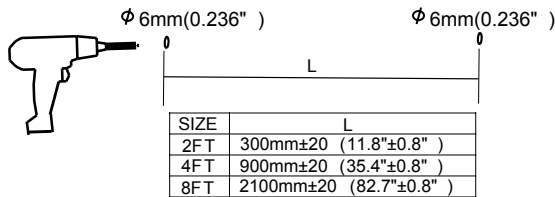


**1** Drill the hole on the wall (The size is shown in the picture)



**2** Drill the anchoring into the opened hole with a nail hammer.


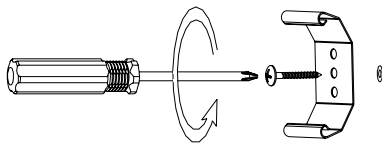


**3** Secure the mounting clips on the wall.

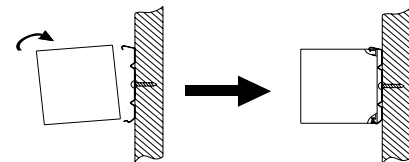

**4** Align the side of the lamp with the clips on the wall and install the fixture to the mounting clips.

**OPERATING GUIDE - CCT ADJUSTABLE**

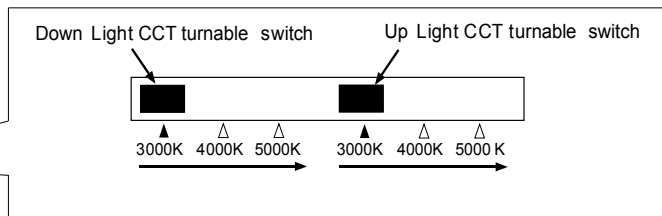

Open the end cap the side with AC wire as the picture shows. Moving the Dip to choose the CCT or you want as the label shows.



**Questions?**

For customer service please call us at 1-310-787-1100  
Office Hours: 8:00 a.m. – 5:00 p.m. PST Monday-Friday  
E-mail: info@eurilighting.com



*LED Linear Suspended*  
**Up & Down light**

**PLEASE REVIEW THE INSTRUCTIONS AND WARNINGS LISTED BELOW PRIOR TO PROPER INSTALLATION**

**LINKABLE INSTRUCTION - CONNECTION INSTALLATION**

**1** Install the Linear 1 to the ceiling as instruction of Suspension Installation. Open the end cap as the picture shows. Pull out 1/2 Power supply board of Linear, and move out the ac wires. Disconnect the A and B parts.

**2** Insert the I-shape plate to the track as the picture shows.

**3** Install the Linear 2 (or L shape, T shape, CROSS shape combination connection fittings) to the ceiling and open the end cap, connect B and C as the picture shows.

**CROSS SHAPE**      **T SHAPE**      **L SHAPE**

**4** Push back Power Supply Board to Linear 1 then insert the I-shape plate to Linear 2 (or L shape, T shape, CROSS shape Combination connection fittings), tighten the I-shape plate with 8 pcs screws. Finally, the U plastic card is buckled at the joint to make the lamps and lanterns more beautiful.

U plastic card  
What it looks like after installation

power cables  
To avoid blocking the power cable connection, the I board is not needed here

Install the Linear Light as above method, keep one main input cord on one side.

**NOTE: LED LINEAR CAN BE JOINTED TOGETHER AS NEEDED, BUT THE TOTAL NUMBER OF FIXTURES SHOULD BE NOT MORE THAN 7PCS (INCLUDING 7PCS) If you order to use 18# cord, More Links can be Customized.**

**EXAMPLES OF PRODUCT PORTFOLIO SHAPES**

