




Questions?

For customer service please call us at 1-888-743-5766
 Office Hours: 8:00 a.m. – 5:00 p.m. PST Monday-Friday



PLEASE REVIEW THE INSTRUCTIONS AND WARNINGS LISTED BELOW PRIOR TO PROPER INSTALLATION

WARNINGS

- Risk of fire / electrical shock
- Installation requires knowledge of luminaire electrical systems.
- Risk of electric shock – disconnect power at source before installation
- Do not make or alter any open holes in an enclosure of wiring or electrical components during installation.
- If the product exhibits abnormal operation (buzzing, flickering, minimal light, etc.), turn off power, remove fixture and contact us. For more information please visit www.eurilighting.com or call our toll-free number 1-888-743-5766.

Preparation

Please check and identify the following parts before the installation. Please do not attempt to retrofit if any of the parts are damaged or missing.

Package Contents

1. MPLR - 1pc
2. Hardwire Connector - 1pc
Model#: M4
3. Wire Nut



A




B



C

Four Mounting Options for MPLR on Fixture Body as follows:

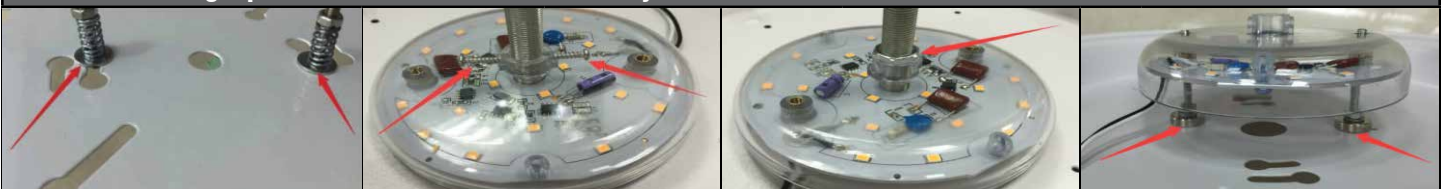

1.

2.

3.


4.

1. Push the Spring screw straight into the key holes; twist the MPLR to the end.
2. Tighten the screw as shown to the mount on the central pole.
3. Screw in the crew as showed to until touch to the MPLR.
4. Magnetic Screw is screwed in the MPLR; adjust the Magnetic screw to the suitable level that you needed. Then stick to the body of the fixture.



Questions?

For customer service please call us at 1-888-743-5766
Office Hours: 8:00 a.m. – 5:00 p.m. PST Monday-Friday



PLEASE REVIEW THE INSTRUCTIONS AND WARNINGS LISTED BELOW PRIOR TO PROPER INSTALLATION

WARNINGS

- Risk of fire / electrical shock
- Installation requires knowledge of luminaire electrical systems.
- Risk of electric shock – disconnect power at source before installation
- Do not make or alter any open holes in an enclosure of wiring or electrical components during installation.
- If the product exhibits abnormal operation (buzzing, flickering, minimal light, etc.), turn off power, remove fixture and contact us. For more information please visit www.eurilighting.com or call our toll-free number 1-888-743-5766.

Fixture Type: MPLR on Plain Ceiling Fixture Body - Instructions for the Installation

1. Insert hardwire connector (B, M4) [Fig.1]

****Note: the connector side must remain as the same side as the ceiling pan. This is important, as it allows the end user to replace the MPLR in the future.****
2. Insert the spring loaded screws of the MPLR into key holes of the fitting base and twist it. (Fig. 2 & 3)
3. Connect hardwire connector with the MPLR connector (Fig. 4 & 5)
4. Connect hardwire with input supply wire with the wire nuts.
5. Turn on the power switch or turn on the circuit breaker for the light test.
6. Switch off MPLR and fix diffuser (Fig. 6 & 7)

